

Section A Wire, Cable, Cord

Building Wire

THHN, USE — Copper
XHHW, USE — Aluminum
Bare Copper

Cable

Armored Cable
Romex, U.F.
SEU, SERG, URD


Portable Cord

SO, SJO,
Welding Cable

Low Voltage Cable

Voice & Data, UTP
Fire Alarm Cable
Security Cable, Thermostat Cable

Cord Sets, Pigtails

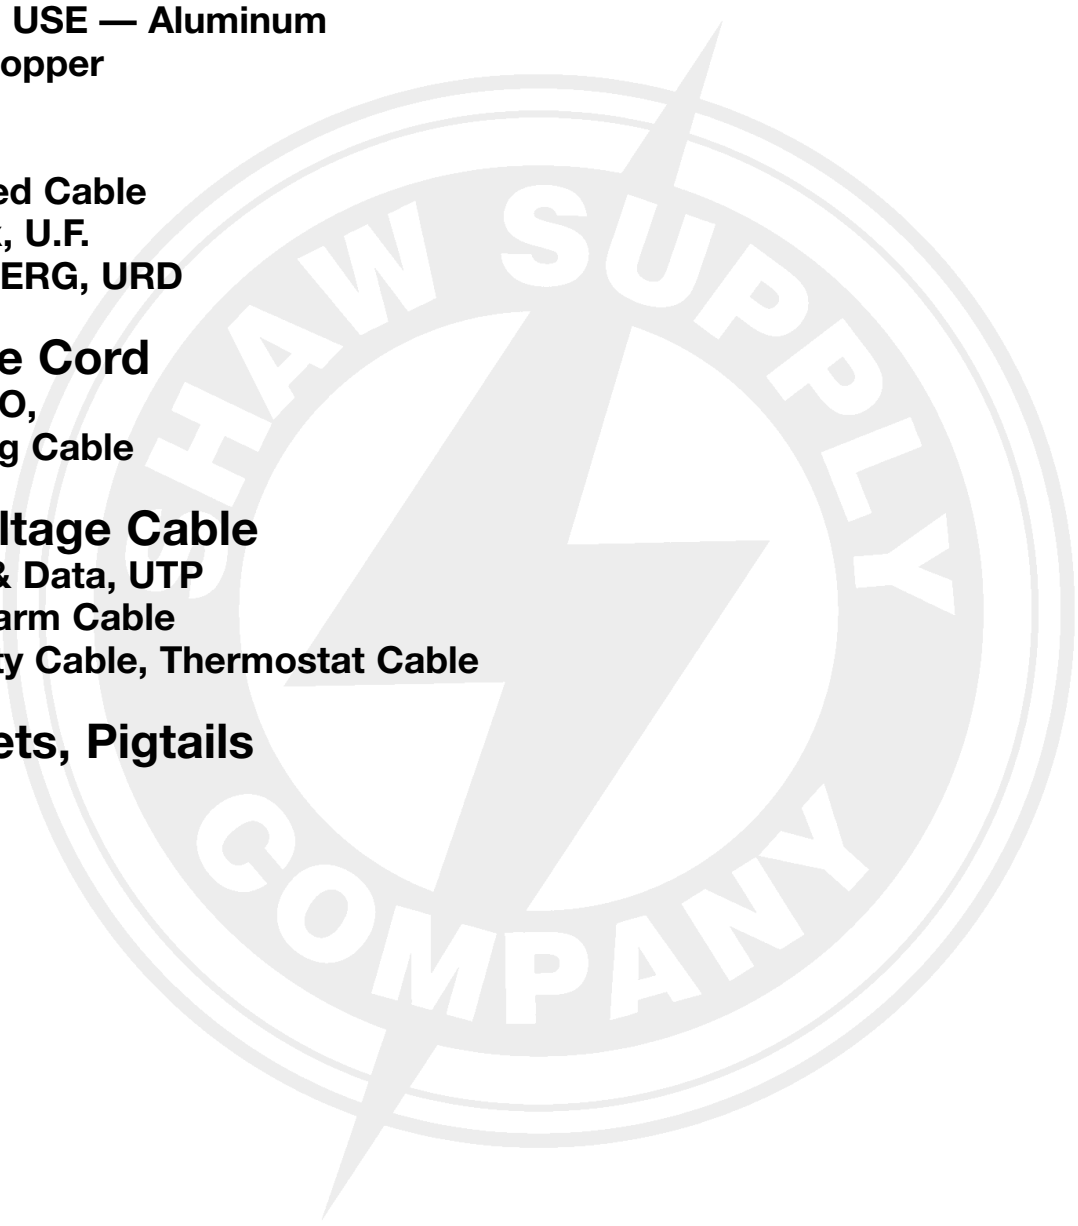




SHAW SUPPLY COMPANY
 1066 East 16th Street
 816-221-0060
 www.shawsupply.com

BUILDING WIRE

THHN TYPE THERMOPLASTIC INSULATED NYLON JACKETED WIRE 90° C—600 VOLT—COPPER



General purpose wiring. Maximum conductor temperature of 90° C in dry locations, 75° C in wet locations, and 60° C when exposed to oil or coolants; for installation in conduit or raceway. Also used for wiring of machine tools (stranded), appliances, and control circuits not exceeding 600 Volts.

PRICED PER 1000'

WIR No. & AWG	O.D., In.	Wt. Per M Feet	Standard Package	Price
---------------	-----------	----------------	------------------	-------

SOLID

THHN-14-SOL ^c	.11	16	500'	\$97.80
THHN-12-SOL ^d	.13	24	500'	138.11
THHN-10-SOL ^a	.16	38	500'	227.27

STRANDED

MTW-18-STR ^a	.11	11	500'	57.22
TFFN-16-STR ^f	.10	13	500'	99.46
THHN-14-STR ^f	.12	17	500'	93.76
THHN-12-STR ^d	.14	26	500'	145.45
THHN-10-STR ^c	.17	39	500'	227.10
THHN-8 ^a	.23	65	500'	376.27
THHN-6 ^a	.26	96	500'	576.65
THHN-4 ^g	.33	156	500'	956.88
THHN-3	.36	192	500'	1140.06
THHN-2	.39	238	500'	1432.62
THHN-1	.45	307	500'	1811.30
THHN-1/0	.50	377	500'	2164.08
THHN-2/0	.54	470	500'	2715.75
THHN-3/0 ^h	.60	591	500'	3410.11
THHN-4/0	.66	734	500'	4516.62
THHN-250 MCM	.70	865	500'	5351.32
THHN-300 MCM	.75	1024	500'	6827.17
THHN-350 MCM	.80	1189	500'	7214.36
THHN-400 MCM	.85	1329	500'	8540.13
THHN-500 MCM ⁱ	.93	1670	500'	10050.35

BARE COPPER WIRE

PRICED PER 1000'

WIR No. & AWG	O.D., In.	Wt. Per M Feet	Standard Package	Price
---------------	-----------	----------------	------------------	-------


SOLID

BARE8	.128	50	500'	\$344.25
BARE6	.162	80	315'	551.26
BARE4	.204	127	200'	905.60

STRANDED

BARE2/0-19	.405	411	500'	2737.24
BARE4/0-19	.510	653	500'	4341.20

XHHW TYPE INSULATED WIRE 90° C—600 VOLT—ALUMINUM



General purpose wiring for lighting and power—residential, commercial, industrial buildings. For installation in conduit or raceways.

PRICED PER 1000' STRANDED

WIR No. & AWG	O.D., In.	Wt. Per M Feet	Standard Package	Price
XHHW-6-AL	.26	40	500'	\$333.37
XHHW-4-AL	.31	58	500'	413.70
XHHW-2-AL	.36	85	500'	561.39
XHHW-1-AL	.42	109	500'	819.63
XHHW-1/0-AL	.45	133	500'	983.74
XHHW-2/0-AL	.49	162	500'	1162.52
XHHW-3/0-AL	.54	199	500'	1443.21
XHHW-4/0-AL	.59	245	500'	1607.30
XHHW-250MCM-AL	.66	293	500'	1958.81
XHHW-350MCM-AL	.75	398	500'	2751.67
XHHW-500MCM-AL	.87	553	500'	3548.01

USE TYPE DUAL RATED UNDERGROUND SERVICE ENTRANCE AND POWER CABLE

90° C—600 VOLT



For general purpose applications at maximum conductor temperature of 90° C in wet or dry locations—including conduit, duct, tray, trough, direct burial and aerial installations. Installed in air, conduit, or raceway.

PRICED PER 1000'—STRANDED

WIR No. & AWG	O.D., In.	Wt. Per M Feet	Standard Package	Price
---------------	-----------	----------------	------------------	-------

ALUMINUM

USE-6-AL	.35	50	500'	\$405.93
USE-4-AL	.39	72	500'	466.39
USE-2-AL	.45	101	500'	647.77
USE-1-AL	.52	128	500'	899.97
USE-1/0-AL	.56	155	500'	1108.11
USE-2/0-AL	.61	190	500'	1300.71
USE-4/0-AL	.72	282	500'	1702.30
USE-250MCM-AL	.80	347	500'	2309.46
USE-350MCM-AL	.91	464	500'	3068.65
USE-500MCM-AL	1.04	634	500'	4119.75

COPPER

USE8CU	.262	70	1000'	585.30
USE6CU	.30	115	1000'	850.39
USE4CU	.34	164	1000'	1302.49

WIRE COLOR SELECTIONS


Code	Bk	Red	Wht	Blue	Grn	Yel	Brn	Or	Gry	Tan	Pink	Pur
a	X	X	X	X	X							
b	X	X	X	X	X	X						
c	X	X	X	X	X	X	X	X				
d	X	X	X	X	X	X	X	X	X		X	X
e	X	X	X	X	X	X	X	X	X			X
f	X	X	X	X	X	X	X	X	X	X	X	X
g	X	X	X		X							
h					X	X	X	X	X			
i						X	X	X	X			

ARMORED CABLE



SHAW SUPPLY COMPANY
 1066 East 16th Street
 816-221-0060
 www.shawsupply.com

ARMORED CABLE 600 VOLT



TYPE MC-LITE

Copper THHN conductors, lightweight interlocked armor, insulated green ground wire.

PRICED PER 1000'

WIR No. & AWG	Wt. Per M Feet	Standard Package	Price
MC14/2	85	250'	\$570.18
MC14/3	105	250'	881.84
MC12/2*	120	250'	519.50
MC12/2STR	120	250'	719.37
MC12/3*	150	250'	849.08
MC12/3STR	150	250'	1108.18
MC12/4*	180	250'	1146.63
MC12/4STR	180	250'	1497.50
MC10/2*	170	250'	990.36
MC10/2STR	170	250'	1373.34
MC10/3*	215	250'	1537.07
MC10/3STR	215	250'	2361.39
MC10/4	250	250'	2428.24
MC10/4STR	250	250'	3114.61
MC8/2	329	200'	1907.71
MC8/3	432	200'	2839.39
MC8/4	370	125'	3992.89
MC6/2	462	125'	2959.18
MC6/3	594	125'	3948.53

277 VOLT

MC12/2BG*	147	250'	587.26
MC12/2OG*	147	250'	587.26
MC12/2YG*	147	250'	587.26
MC12/3BOG*	186	250'	849.08
MC12/3BYG*	186	250'	849.08
MC12/3OYG*	186	250'	849.08
MC12/4BOYG*	225	250'	1146.63

B=Brown G=Gray O=Orange Y=Yellow

* Also available on 1000 ft. reel.

TYPE HCF-90

Health Care Facilities Cable; copper THHN conductors, steel interlocked armor, insulated green ground wire, 16 ga. integral bonding wire.

PRICED PER 1000'

WIR No. & AWG	Wt. Per M Feet	Standard Package	Price
HCF9012/2*	134	500'	\$964.61
HCF9012/2STR	139	500'	1164.89
HCF9012/3	170	500'	1393.28
HCF9012/3STR	170	500'	1631.87
HCF9012/4	220	250'	2080.45
HCF9010/2	290	125'	1515.90
HCF9010/3	345	125'	2331.83
HCF9010/4	405	125'	3745.03

277 VOLT

HCF9012/2BG	134	250'	964.61
HCF9012/2YG	134	250'	964.61
HCF9012/3BOG	170	250'	1393.28
HCF9012/4BOYG	220	250'	2080.45

B=Brown G=Gray O=Orange Y=Yellow

* Also available on 1000 ft. reel.

ARMORED CABLE (CONTINUED) 600 VOLT

TYPE IG — ISOLATED GROUND PRICED PER 1000'

WIR No. & AWG	Wt. Per M Feet	Standard Package	Price
MC12/2IGMCT	186	250'	\$911.65

TYPE AC-90

Copper THHN conductors, steel interlocked armor, 16 ga. integral bonding wire. No separate ground wire.

PRICED PER 1000'

WIR No. & AWG	Wt. Per M Feet	Standard Package	Price
AC9012/2	200	250'	\$540.41
AC9012/3	230	250'	861.18
AC9012/4	260	250'	1242.91
AC9010/2	250	250'	980.69
AC9010/3	280	250'	1353.22


HOME RUN CABLE

Multi-conductor copper THHN cable, steel interlocked armor, green insulated ground wire.

PRICED PER 1000'

WIR No. & AWG	Wt. Per M Feet	Standard Package	Price
HR12/6	360	500'	\$1411.11
HR12/8	410	500'	1827.09

PVC JACKETED MC CABLE 600 VOLT




Copper THHN conductors, galvanized interlocked steel armor with gray PVC jacket, insulated green ground wire.

PRICED PER 1000'

WIR No. & AWG	Wt. Per M Feet	Standard Package	Price
JMC12/2	280	250'	\$1103.98
JMC12/3	320	250'	1947.95

ANTI-SHORT BUSHINGS



High dielectric insulation. For armored cable. Priced per 100.


ARL No.	Wire Size	Standard Package	Price
AS0	14/2, 14/3, 12/2	100	\$7.50
AS1	14/4, 12/3, 6/1, 4/1	100	6.35
AS2	12/4, 10/2, 10/3, 2/1	50	11.89
AS3	10/4, 8/2, 8/3, 1/1	50	15.92
AS4	8/4, 6/2, 6/3, 6/4, 4/2, 4/3	50	17.77



SHAW SUPPLY COMPANY
 1066 East 16th Street
 816-221-0060
 www.shawsupply.com

COPPER, ALUMINUM CABLE

ROMEX TYPE THERMOPLASTIC JACKETED NON-METALLIC SHEATHED CABLE 90° C—600 VOLT—COPPER



2 or 3 conductor for interior wiring both exposed and concealed, in normally dry locations.

PRICED PER 1000'

WIR No. & AWG	O.D., In.	Wt. Per M Feet	Standard Package	Price
GROUNDING—SOLID				
ROM-14/2-G#	.22 x .43	69	250'	\$293.60
ROM-12/2-G#	.26 x .26	94	250'	447.73
ROM-10/2-G	.29 x .52	140	250'	707.92
ROM-14/3-G	.40	98	250'	411.49
ROM-12/3-G	.45	134	250'	637.18
ROM-10/3-G	.50	188	250'	1007.83

GROUNDING—STRANDED				
WIR No. & AWG	O.D., In.	Wt. Per M Feet	Standard Package	Price
ROM-8/2-G	.35 x .70	233	125'	1161.37
ROM-6/2-G	.44 x .77	333	125'	1711.77
ROM-8/3-G	.64	319	125'	1787.39
ROM-8/3*	.64	284	125'	1874.95
ROM-6/3-G	.74	459	125'	2477.51
ROM-6/3*	.74	425	125'	2883.21

* No ground wire.

Also available on 1000 ft. reel.

UF TYPE UNDERGROUND FEEDER CABLE 60° C—600 VOLT—COPPER




2 and 3 conductor used as a feeder to outside loads. Can be used underground, including direct burial, or for interior branch circuits in wet, dry or corrosive locations at conductor temperatures not to exceed 60° C.

PRICED PER 1000'—GROUNDING—SOLID

WIR No. & AWG	O.D., In.	Wt. Per M Feet	Standard Package	Price
UF-14/2-G	.19 x .41	75	250'	\$330.16
UF-12/2-G	.21 x .42	104	250'	506.34
UF-10/2-G	.28 x .48	152	250'	811.43
UF-14/3-G	.21 x .60	121	250'	473.98
UF-12/3-G	.23 x .64	158	250'	714.29
UF-10/3-G	.68 x .67	215	250'	1122.45

SEU TYPE SERVICE ENTRANCE CABLE 90° C—600 VOLT—COPPER




For above ground electrical service from the utility power service point to the meter or service entrance panel. Cable contains 2 insulated conductors and 1 concentric neutral conductor.

PRICED PER 1000'

WIR No. & AWG	Amps*	Wt. Per M Feet	Standard Package	Price
SEU4/3CU	100	494	500'	\$3540.40
SEU2/03CU	200	1431	500'	11070.31

*Based on 2002 NEC for 1 phase dwelling service.

SER TYPE SERVICE ENTRANCE CABLE 75° C—600 VOLT—ALUMINUM




Used to convey power from meter base to distribution panelboard, to connect a masthead to a meter base (where overhead service drops are employed), and as branch circuits to large load centers. Suitable for use at temperatures not to exceed 75° C in wet locations.

PRICED PER 1000'
 3 CONDUCTOR—STRANDED

WIR No. & AWG	O.D., In.	Wt. Per M Feet	Standard Package	Price
SER-2/3-AL	.92	344	500'	\$1791.15
SER-4/0-3-AL	1.47	942	500'	4408.69

SERG TYPE GROUNDED SERVICE ENTRANCE CABLE

90° C—600 VOLT—ALUMINUM



Three insulated conductors of XHHW and one uninsulated grounding conductor. PVC jacketed.

PRICED PER 1000'
 3 CONDUCTOR WITH GROUND—STRANDED

WIR No. & AWG	O.D., In.	Wt. Per M Feet	Standard Package	Price
SERG-2/3-AL	1.00	405	500'	\$2240.34
SERG-4/0-3-AL	1.63	1053	500'	5740.78

UNDERGROUND DISTRIBUTION CABLE 90° C—600 VOLT—ALUMINUM



Polyethylene insulated triplex for direct burial. Yellow striped neutral.

WIR No. & AWG	Wt. Per M Feet	Standard Package	Price/1000'
URD-2/3-AL	292	500'	\$1507.03
URD-4/0-3-AL	740	500'	2969.42

ALUMINUM SERVICE DROP CABLE



Polyethylene insulated aluminum conductors wrapped around bare ASCR neutral messenger cable.

PRICED PER 1000'

WIR No. & AWG	Wt. Per M Feet	Standard Package	Price
VOLUTA6/3	113	2200'	\$786.87
PERIWINKLE4/3	170	1500'	997.88
CONCH2/3	258	1800'	1242.92
HACKNEY4/4	225	1700'	1358.64
PALOMINO2/4	341	1800'	1753.43


WEDGE GRIP CLAMPS FOR CABLE, SEE PAGE F-4.

PORTABLE CORD, POWER CORDS



SHAW SUPPLY COMPANY
1066 East 16th Street
816-221-0060
www.shawsupply.com


SO/SEOOW TYPE PORTABLE CORD 600 VOLT



90° C neoprene black jacketed cord. High in resistance to oil, abrasion, flame and impact. Use in heavy duty applications where oil and acids are present.

CAR No. & AWG	O.D., In.	Wt. Per M Feet	Standard Package	Price/ 1000'
SO-16/3	.390	81	250'	\$555.88
SO-16/4	.420	99	250'	807.20
SO-14/3	.525	149	250'	889.78
SO-14/4	.575	183	250'	1107.48
SO-12/3	.595	199	250'	1176.44
SO-12/4	.645	242	250'	1358.25
SO-10/3	.655	259	250'	1484.55
SO-10/4	.705	316	250'	1721.86
SO-8/3	.700	332	250'	3402.61
SO-8/4	.783	425	250'	4002.21
SO-6/3	.818	473	250'	4387.85
SO-6/4	.892	594	250'	5181.96
SO-4/3	.982	677	250'	5895.12
SO-4/4	1.104	886	250'	8970.93


SJO/SJEOOW TYPE PORTABLE CORD 300 VOLT



90° C neoprene black jacketed cord. High in resistance to oil, abrasion, flame and impact. Use in heavy duty applications where oil and acids are present.

CAR No. & AWG	O.D., In.	Wt. Per M Feet	Standard Package	Price/ 1000'
SJO-16/3	.335	78	250'	\$476.91
SJO-14/3	.370	84	250'	682.06
SJO-12/3	.435	123	250'	976.78

WELDING CABLE



Supreme flexibility at extreme temperatures between -50°C to 105°C. High resistance to flame, oil, grease, solvents, ozone and abrasion. 600V high dielectric strength integrity. Seoprene insulation.

CAR No.	Size	Nom. O.D.	Wt./1000'	Price/ 1000'
WLD6	6 AWG	.350"	129	\$912.28
WLD4	4 AWG	.400"	189	1123.27
WLD2	2 AWG	.475"	277	1729.89
WLD1	1 AWG	.505"	351	2239.19
WLD1/0	1/0 AWG	.584"	444	2639.89
WLD2/0	2/0 AWG	.630"	560	3463.10
WLD4/0	4/0 AWG	.790"	880	5565.97

RECOMMENDED WELDING CABLE COPPER SIZE

Welding Current Amps	LENGTH OF CABLE IN CIRCUIT FEET - TOTAL OF BOTH ELECTRODE AND GROUND CABLE											
	50	75	100	150	200	250	300	350	400	450	500	
100	4	4	4	4	2	2	1	1/0	1/0	2/0	2/0	
150	4	4	4	2	1	1/0	2/0	3/0	3/0	4/0	4/0	
200	2	2	2	1	1/0	2/0	3/0	4/0	250	50	350	
250	2	2	2	1/0	2/0	3/0	4/0	250	350	350	350	
300	1	1	1	2/0	3/0	4/0	250	350	350	500	500	
350	1/0	1/0	1/0	3/0	4/0	250	350	350	500	500	500	
400	2/0	2/0	2/0	3/0	250	350	350	500	500	500	--	
500	3/0	3/0	3/0	4/0	350	350	500	500	--	--	--	
600	4/0	4/0	4/0	250	350	500	500	--	--	--	--	

RANGE/DRYER PIGTAILS

CLM No.	Config.	Cord Type	Length	Std. Pkg.	Price Each
09044	NEMA 14-50 	Range, 4-W	4'	6	\$14.41
09046	NEMA 14-50 	Range, 4-W	6'	6	1858
09016	NEMA 10-50 	Range, 3-W	6'	6	1372
09154	NEMA 14-30 	Dryer, 4-W	6'	6	12.90
09155	NEMA 14-30 	Dryer, 4-W	6'	6	N/A
09126	NEMA 10-30 	Dryer, 3-W	6'	6	8.99



SHAW SUPPLY COMPANY
 1066 East 16th Street
 816-221-0060
 www.shawsupply.com


POWER CORDS, EXTENSION CORDS

POWER SUPPLY CORDS GENERAL PURPOSE—13 AMP 125 VOLT



EPC No.	Cord Type	Length	Standard Package	Price Each
RIGHT ANGLE				
PCR3	16/3 SPT	3'	25	\$2.75
PCR6	16/3 SPT	6'	25	3.88
STRAIGHT CAP				
PCS3	16/3 SPT	3'	25	2.24
PCS6	16/3 SPT	6'	25	2.91
PCS12	16/3 SPT	12'	25	4.91

EXTENSION CORDS



POLAR/SOLAR OUTDOOR EXTENSION CORDS

Lightweight, stays flexible to -67°F. Features power indicator in the female receptacle. Outdoor jacket is flame retardant and water resistant.

CLM No.	Description	Color	Std. Pkg.	Price Each
01688	12/3, SJEOW, 50', 15A/125V.	Yellow	6	\$38.72
01689	12/3, SJEOW, 100', 15A/125V.	Yellow	4	69.59
03482	12/3, SJEOW, 2' tri-tap, 15A/125V.	Yellow	12	14.58

PUSH-LOCK CORDS

Unique Push-Lock mechanism keeps cords connected until you want to disconnect them. Also features lighted connector to indicate that power is on.

CLM No.	Description	Color	Std. Pkg.	Price Each
02518	12/3, SJTW, 45', 15A/125V.	Yellow/Black	4	\$30.99
02519	12/3, SJTW, 90', 15A/125V.	Yellow/Black	3	54.49

VINYL OUTDOOR CORDS

All purpose cords – resists moisture and abrasion.

CLM No.	Description	Color	Std. Pkg.	Price Each
02408	14/3, SJTW, 50', 15A/125V.	Orange	6	\$21.29
02409	14/3, SJTW, 100', 15A/125V.	Orange	6	36.03
02588	12/3, SJTW, 50', 15A/125V.	Orange	6	30.01
02589	12/3, SJTW, 100', 15A/125V.	Orange	4	48.58

AIR CONDITIONING WHIP



Includes 1 straight and 1 90° connector and 2 reducing washers.

EPC No.	Description	Std. Pkg.	Price Each
ACWNM1063-IRA	A/C whip, 6 ft., 1/2" non-metallic with 3 - #10 AWG wires.	20	\$15.20
ACWNM863-IRA	A/C whip, 6 ft., 3/4" non-metallic with 2 - #8 AWG and 1 - #10 AWG wires.	20	21.85

GFCI IN-LINE TRI-SOURCE EXTENSION CORDS



Provides personal protection from ground faults and open neutral conditions.

CLM No.	Description	Color	Std. Pkg.	Price Each
02841	12/3, 2.5', 120V - 1800 Watts.	Yellow	6	\$29.77

TROUBLE LIGHT



CLM No.	Description	Color	Std. Pkg.	Price Each
05427	16/3, 25', metal guard, 75W max. lamp.	Orange	6	\$16.53

VINYL "Y" AND "W" ADAPTERS



CLM No.	Description	Color	Std. Pkg.	Price Each
09018	12/3, STW, 2' "Y" adapter.	Yellow	12	\$19.82
09019	12/3, SJW, 2', "W", adapter.	Yellow	12	24.42

LOW VOLTAGE CABLE




SHAW SUPPLY COMPANY

1066 East 16th Street

816-221-0060

www.shawsupply.com

VOICE & DATA UTP CABLE



Unshielded twisted copper pairs. Nominal impedance of 100 ohms.

CBL No.	Description	Std. Pkg.	Price/ 1000'
CATEGORY 5e			
C5e4PPLBL	4 pair, plenum, blue.	1000'	\$321.65
C5e4PPVCBL	4 pair, PVC, blue.	1000'	119.91
C5e4PPLWH	4 pair, plenum, white.	1000'	321.65
C5e4PPVCWH	4 pair, PVC, white.	1000'	119.91
BACKBONE-CATEGORY 5			
C525PPLGY	Cat5, 25pr., plenum, gray.	1000'	1667.00
C525PPVCGY	Cat5, 25pr., PVC, gray.	1000'	735.00

FIBER OPTIC CABLE

CBL No.	Description	Std. Pkg.	Price/ 1000'
12FMPLTB-ALC	12 strand, multi-mode, plenum.	1000'	\$1388.35
12FMPVCLT-ALC	12 strand, multi-mode, PVC.	1000'	1374.80
6FMPLTB-ALC	6 strand, multi-mode, plenum.	1000'	737.85
6FMPVCLT-ALC	6 strand, multi-mode, PVC.	1000'	897.45

FIRE ALARM CABLE



Standard Cable



Shielded Cable

Wiring for fire-protective signalling circuits. Twisted solid copper conductors with polypropylene insulation. Red jacket.

Shield: aluminum/mylar wrap with drain wire.

CBL No.	Description	Std. Pkg.	Price/ 1000'
F18/2SPVC	18 ga., 2 cond., PVC, shield.	1000'	\$98.02
F18/2SPL	18 ga., 2 cond., plenum, shield.	1000'	116.81
F14/2NSPVC	14 ga., 2 cond., PVC, no shield.	1000'	179.19
F14/2NSPL	14 ga., 2 cond., plenum, no shield.	1000'	224.84
F14/2SPL	14 ga., 2 cond., plenum, shield.	1000'	242.96

SECURITY CABLE



For burglar alarms, public address systems, intercoms, telephones, speakers, control and other low voltage circuits. Twisted stranded copper conductors with PVC insulation and plenum rated outer jacket. Shield: aluminum/mylar wrap with drain wire.

CBL No.	Description	Std. Pkg.	Price/ 1000'
22/6SPL	22 ga., 6 cond., plenum, shield.	1000'	\$158.30
22/4NSPL	22 ga., 4 cond., plenum, no shield.	1000'	98.58
22/4SPL	22 ga., 4 cond., plenum, shield.	1000'	129.09
22/2NSPL	22 ga., 2 cond., plenum, no shield.	1000'	55.46
22/2SPL	22 ga., 2 cond., plenum, shield.	1000'	85.79
18/6NSPL	18 ga., 6 cond., plenum, no shield.	1000'	267.01
18/6SPL	18 ga., 6 cond., plenum, shield.	1000'	288.85
18/2NSPVC	18 ga., 2 cond., PVC, no shield.	1000'	90.58
18/2NSPL	18 ga., 2 cond., plenum, no shield.	1000'	115.37
18/2SPVC	18 ga., 2 cond., PVC, shield.	1000'	135.98
18/2SPL	18 ga., 2 cond., plenum, shield.	1000'	136.92
16/2NSPL	16 ga., 2 cond., plenum, no shield.	1000'	150.46

THERMOSTAT WIRE



60° C, 30 Volt wire. For thermostat controls, intercom systems, bell and annunciator systems and other low voltage installations. Full 18 gauge solid copper conductors.

SPC No. & Conductors	Standard Package	Price/ 1000'
PVC		
PJ18/2	500'-2000'	\$127.85
PJ18/3	500'-2000'	188.05
PJ18/4	250'-1000'	248.31
PJ18/5	250'-1000'	320.50
PJ18/6	250'-1000'	374.07
PJ18/7	250'-1000'	421.99
PJ18/8	250'-1000'	485.00
PJ18/10	250'-1000'	695.96
PLENUM		
PJ18/2PLENUM	500'-2000'	408.44
PJ18/3PLENUM	500'-2000'	521.09
PJ18/4PLENUM	250'-1000'	911.96
PJ18/5PLENUM	250'-1000'	1014.84
PJ18/6PLENUM	250'-1000'	1079.38
PJ18/8PLENUM	250'-1000'	1209.00

CORD AND WIRE PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE. CALL FOR A FIRM QUOTE.



SHAW SUPPLY COMPANY
 1066 East 16th Street
 816-221-0060
 www.shawsupply.com

LOW VOLTAGE CABLE


COAX CABLE FOR AUDIO/VIDEO



Solid bare copper clad steel conductor with foam insulation, and fusible aluminum braid.

SPC No.	Size	Shield	Std. Pkg.	Price/ 1000'
CATVRG6	18-1	60%	1000'	\$110.72

MODULAR PATCH CORDS WITH SNAG FREE BOOTS

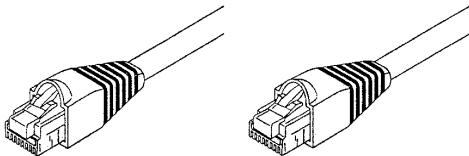

Category 5 Modular Patch Cords provide optimum performance for interconnecting network equipment to the horizontal cable structure, whether in the wiring closet or at the workstation area.

GRU No.	Length, Ft.	Connectors	Price Each
PC53XX*	3	RJ45 - RJ45	\$2.62
PC55XX*	5	RJ45 - RJ45	3.07
PC57XX*	7	RJ45 - RJ45	3.57
PC510XX*	10	RJ45 - RJ45	4.20
PC514XX*	14	RJ45 - RJ45	5.20

* Replace **XX** in part number with one of the following to identify color: "BL" for Blue, "GY" for Gray, "GN" for Green, "RD" for Red, "YL" for Yellow, "WT" for White.

ENHANCED PATCH CORDS

GRU No.	Color	Length, Ft.	Connectors	Price Each
PC5E3BL	Blue	3	RJ45 - RJ45	\$1.50
PC5E3WT	White	3	RJ45 - RJ45	1.50
PC5E5BL	Blue	5	RJ45 - RJ45	1.90
PC5E5WT	White	5	RJ45 - RJ45	1.90
PC5E7BL	Blue	7	RJ45 - RJ45	2.25
PC5E7WT	White	7	RJ45 - RJ45	2.25
PC5E10BL	Blue	10	RJ45 - RJ45	2.75
PC5E10WT	White	10	RJ45 - RJ45	2.75
PC5E14BL	Blue	14	RJ45 - RJ45	3.30
PC5E14WT	White	14	RJ45 - RJ45	3.30
PC5E25BL	Blue	25	RJ45 - RJ45	5.10
PC5E25WT	White	25	RJ45 - RJ45	5.10

